

# Blue 46 Meter Roll and Fold KCP Concrete Pump


## 135 Feet Reach From Front Bumper

### BOOM SPECIFICATIONS

<b>Vertical reach</b>	45 M	(147' 8")
<b>Horizontal reach</b>	40.9 M	(134' 2")
<b>Reach from front of truck</b>	38.6 M	(126' 8")
<b>Unfolding height</b>	8.9 M	(29' 2")
<b>Section articulation</b>	92°/180°/225°/180°/210°	
<b>Rotation</b>	370°	
<b>Delivery line</b>	125mm	(5")
<b>Proportional boom</b>	Yes	
<b>End hose length</b>	3.5 M	(11' 6")
<b>Outrigger spread-front</b>	8.8M	(28' 10.5")
<b>Outrigger spread-rear</b>	9.5 M	(31' 2")
<b>Max. outrigger weight</b>	29,000kg	(63,934 lbs)

### PUMP SPECIFICATIONS

<b>Maximum output</b>	170 m <sup>3</sup> /h	(222 yd <sup>3</sup> /h)
<b>Concrete cylinder</b>	0230 x 2100mm	(9" x 83")
<b>Stroke per minute</b>	32	
<b>Concrete pressure</b>	95bar	(1377 psi)
<b>Hopper capacity</b>	0.6 m <sup>3</sup>	(21 ft <sup>3</sup> )
<b>S-tube</b>	0230 x 0180mm	(9" x 7")
<b>Hydraulic pump</b>	Rexroth A20VL0190	
<b>Cycling system</b>	Hydraulic with manual overrides	
<b>Max aggregate size</b>	40 mm	(1.5")
<b>Water tank volume</b>	600L	158.5Gal

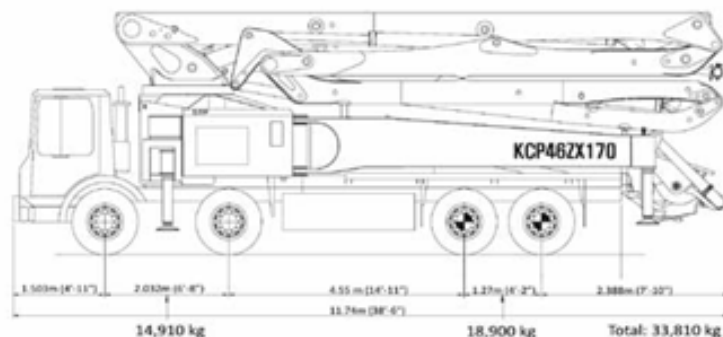

# Blue 46 Meter Roll and Fold KCP Concrete Pump

## 135 Feet Reach From Front Bumper

